


## GU-10 super bright inground light

RoHS CE P67



AD2FU0110A



121 Mounting sleeve

### Specifications

Housing	12' Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front ring	Stainless steel SUS 316L
Glass	Tempered glass, T=6mm
Loading capacity	Exert force area of Ø10=845kgs Ø30=973kgs
Cable gland	IP-68 PG-9 copper and nickel coated
Gasket	Molding shaped silicone seal
Power cable	H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (for Single color)
Mounting sleeve	121 Die casting aluminum

Item No.	Light source	Input voltage (v)	Typical operating current(mA)
AD2FU0110A	GU-10	120/240	—

## Surface light LED inground lamp

RoHS CE P67



AD2G3607A




AD2H2507A



135 Mounting sleeve



136 Mounting sleeve

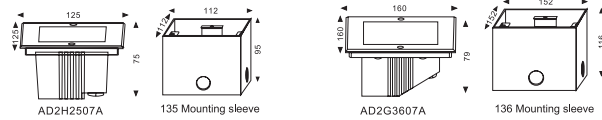

### Specifications

Housing	12' Die-casting grey powder coated aluminum, T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
Front cover	Stainless steel SUS 316L
Glass	Tempered coating white glass, T=8mm
Loading capacity	AD2G3607A exert force area of Ø10=805kgs Ø30=1433kgs Ø60=1817kgs AD2H2507A exert force area of Ø10=455kgs Ø30=1081kgs Ø60=2000kgs
Cable gland	IP-67 copper and nickel coated
Gasket	Molding shaped silicone seal
LED	SMD3020 type power LED
PCB	Silicone Sealed
Driver	Constant current output
Operating temperature	-20°C~40°C
Power cable	H05RN-F 3X1.0mm <sup>2</sup> L=0.5m
Mounting sleeve	136, 135 Zinc plated mounting sleeve grey powder coated, T=60-80µm, Adhesion of ISO class 1/ASTM class 4B

Item No.	Light source	The manufacturer selected lens/degree (°)	Input voltage (v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance (lm)	IK rate
AD2G3607A	36×SMD3020	120	120 / 240	120V=5.0 240V=32	120V=3.1 240V=3.3	Cool white=150 Warm white=138	09
AD2H2507A	25×SMD3020	120	120 / 240	120V=43 240V=30	120V=2.8 240V=3.2	Cool white=124 Warm white=101	09