



Red Green Blue White 4-Colors in 1 LED wall washer




RGBW 6C type

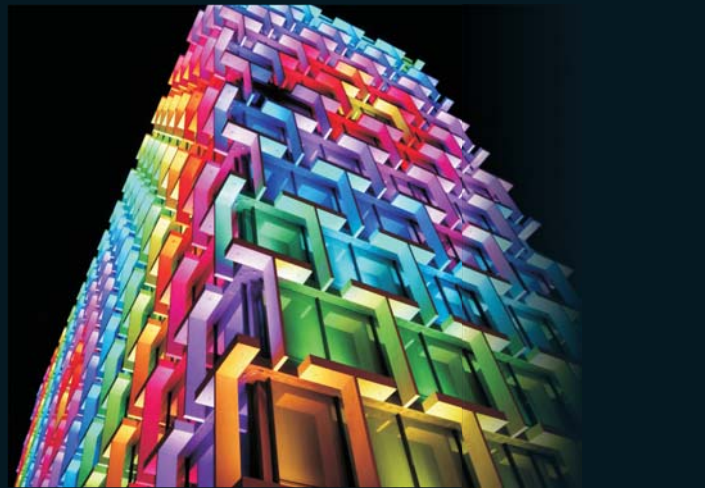

Low voltage power




Single cable type



Twin cable type



Plug-socket connector(option)

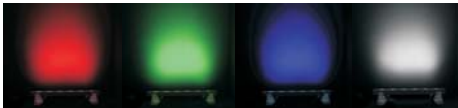

RGBW 4colors in 1 LED AL0115F038KTA 15' AL0130F038KTA 30'

AL0145D028KPA

Impression drawing of lens C6

### Specifications

Housing	Extruded aluminum, powder coated
Bracket	12' Die-casting powder coated aluminum
Glass	Tempered glass, T=3mm
Lens	Optical lens, efficiency > 85%
Cable gland	PVC IP-68 PG-11
Connector	IP-68 plug male/female
Gasket	Glass and housing are silicone sealed
LED	RGBW 4in1 power LED
Operating temperature	-20 °C ~ 40 °C
Power cable	Input: waterproof plug connector Output: waterproof socket connector RGBW 24VDC: 2 × H05RN-F 6 × 0.5mm <sup>2</sup> L=0.5m

Item No.	Light source	The manufacturer selected lens	Degree (°)	Length L (mm)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
AA6FA0620A	6 × 4W RGBW 4IN1	A23	30	500	24VDC	R=321 G=352 W=350	32	744	05
AA6FA1220A	12 × 4W RGBW 4IN1	A23	30	1003	24VDC	R=600 G=700 W=700	64	1904	05
AC6FA0620A	6 × 4W RGBW 4IN1	C6	45/35	500	24VDC	R=288 G=306 W=344	30	843	05